




OWP Series



Description

The **OWP Series** is an energy saving LED replacement for HID wall packs. The sleek, modern design is suitable for most Outdoor installations. Die cast aluminum housing has 1/2" NPS tapped on both sides and on the back for easy installation of conduit or photo-control. Applications include parking lots, walkways, sidewalks and area lighting.

Dimensions

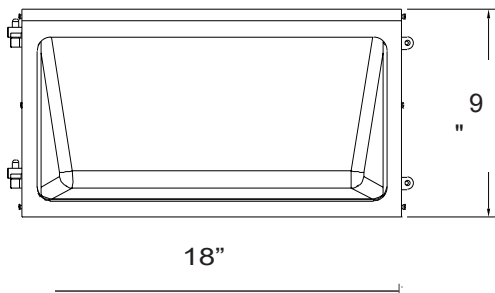

Date	Catalog #
Type	Project
Prepared by	Comments

Features and Specifications

ENCLOSURE

Aluminum housing with hinged front to provide front access to the Interior LED Light Engine. Housing has (3) 1/2" NPS entry points: one on each side, one on the back and one on top for the Photocell. Bronze finish is a durable polyester powder coating applied after a multi-stage, pre-treatment process. Housing and door are sealed with a gasket.

LENS


Borosilicate **glass** with a prismatic pattern for Type IV light distribution.

ELECTRICAL

Universal voltage (120V-277V) driver with 6,000 lumen LED light engine. LEDs produce 4000K CCT light with 80 CRI and are rated for over 50,000 hours.

Ordering Information

Example Catalog Number – OWP-64-U

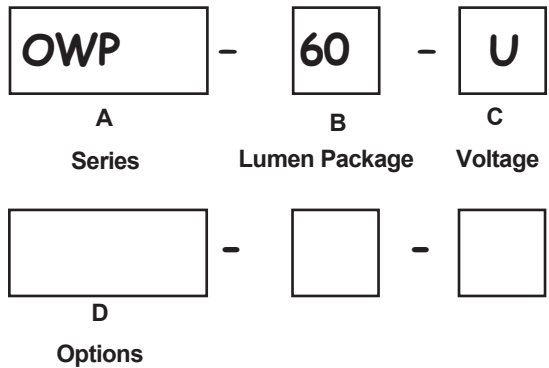

Catalog Logic:

A. Series

OWP = LED Wall Pack

B. Lumen Package

120 = 12,000 Lumen Package

60 = 6,000 Lumen Package

C. Voltage

U = Universal Voltage 120V – 277V

UNB = (120V-277V) Non-Switching Battery Back-Up

USB = (120V-277V) Switching Battery Back-Up

48 = 480 V

D. Options

WB = Wall Bracket - Loose

P = Photocell - Exterior- Installed

OPERATING RANGE:

(6,000lm) ===== -20°C to 50°C

(12,000lm) ===== -20°C to 40°C

(480V) ===== -20°C to 40°C

Battery Back-Up = 0°C to 40°C

Consult factory for all available options & configurations.

